



EU-TYPE EXAMINATION CERTIFICATE



The following model of Personal Protective Equipment has been subjected to an EU-type examination in accordance with the module B of the PPE regulation (2016/425) and has been shown to satisfy to essential health and safety requirements.

Certificate N° 0075/797/162/03/19/1041

Issued by CTC, Notified Body N°0075, to the following model of personal protective equipment :

Manufacturer : HONEYWELL SAFETY PRODUCTS EUROPE
Immeuble Edison ZI-Paris Nord II 33, Rue des Vanesses 95 958
ROISSY CDG CEDEX
France

Description


PPE Type : *protective glove against mechanical risks, chemical risks, microorganisms risks and other risks*

Product reference : 2095020

Glove description : 5 fingers glove Polychloroprene, cotton flocked. Diamond finishing

Available sizes : 07 08 09 10 11

Pictures :

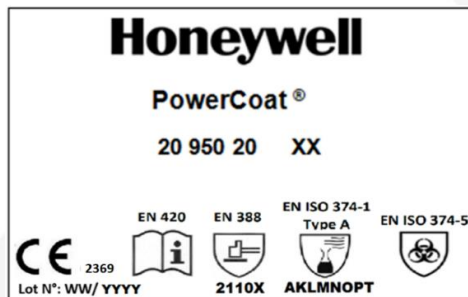

Address:
HONEYWELL SAFETY PRODUCTS EUROPE
Immeuble Edison ZI-Paris Nord II
33 Rue des Vanesses
95 958 ROISSY CDG CEDEX
France

Address has to be printed on back side of the gloves or on a label inside the gloves.

Reference standard :

Levels of performance / class of protection

EN 420:2003 + A1:2009

-

EN 388:2016 + A1:2018

2 1 1 0 X

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.

EN ISO 374-5:2016

MICRO-ORGANISMS

EN ISO 374-1:2016 / A1:2018

Type A

AKLMNOPT

This product is a category III (lethal or irreversible risk). This certificate shall only be used in conjuncture with the conformity assessment procedure according to module C2 (VIPO 2369)

At the date of certificate the product is in compliance with Annex XVII of REACh regulation (n° 1907/2006 and revisions)

Full description of the PPE, reference rules verified in the context of the EU-type examination and information given on the product are detailed in the manufacturer's technical file and the Instruction for Use index 02 dated from June, 2021

NOTA : Any modification to new items of the personal protective equipment object of this EU type approval certificate or any modification of the information contained in the manufacturer technical file which served for the deliverance of the EU type approval certificate (change of address, change of company status) should be brought to the attention of the notified body in accordance with Annex V §7.2 of Regulation 2016/425. Any marking on the PPE which is not concerned by the Regulation (UE) 2016/425, is not covered by this certificate.

Issued in Lyon by 
Didier GUISSADO
Certification and Quality Manager

Date of first issue : 29 March 2019
End of validity date : 29 March 2024
Update 01 : 21 June 2021



www.ctcgroupe.com

cemarking@ctcgroupe.com



In application of the Regulation 2016/425 of the European parliament and the Council of 9th March 2016 related to Personal Protective Equipment and repealing the Directive 89/686/EEC.



Accreditation n° 5-0594
Scope available on:
www.cofrac.fr

CTC - 4, rue Hermann Frenkel - 69367 Lyon cedex 07 - France
Tel. : +33 (0)4 72 76 10 10 - Fax : +33 (0)4 72 76 10 00 - ctclyon@ctcgroupe.com

Comité Professionnel de Développement Économique (CPDE) Cuir Chaussure Maroquinerie Ganterie
Loi 78-654 du 22.06.1978 - Siret 77564972600160 - Code NAF 9412Z - TVA FR 88775649726

HONEYWELL SAFETY PRODUCTS EUROPE

MANUFACTURER'S TECHNICAL FILE TO THE PPE REGULATION 2016/425

Reference of the product	:	2095020
Article code	:	
Technical file index	:	02
Last update	:	June, 2021

IDENTIFICATION

Reference of the product : : 2095020
Article code : :
Basic Model
Technical file index : : 02
Last update : : June, 2021

Manufacturer :

HONEYWELL SAFETY PRODUCTS EUROPE

Immeuble Edison ZI-Paris Nord II 33, Rue des Vanesses 95 958 ROISSY CDG
CEDEX

France

tel : 01.49.90.79.79

fax : 01.49.90.79.80

Factory :

RUBBEREX (M) SDN BHD EUR

LOT 138201 OFF 3/4 MILE JALAN 31400 IPOH, PERAK

Malaisie

tel: 006055482723

fax: 006055482726

Usine : Filrex Malaysia SDN Bhd

LOT 21251, off 3/4 miles, Jalan Bercham, 31400 ipoh, Perak

Malaysia

tel:

fax:

GLOVE DESCRIPTION

General glove description :

5 fingers glove Polychloroprene, cotton flocked. Diamond finishing

type of coating finish : no coating

Visual description (picture back and palm sides) :



Field of use

mechanical, chemical and micro-organism, Industry: Agriculture, Automotive and Part Manufacturer, Building and Construction, Chemical Industries, Industrial Cleaning, Maintenance, Petro-chemical, Water treatment,

Risk assessment (Essential Health and Safety Requirement. Annex II - PPE Regulation)			
		Applicable	Covered by
§1	Requirements defined in the Annex II §1 are applicable to all PPE	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input checked="" type="checkbox"/> Marking
§1.4	Manufacturer's instructions and information is available	<input checked="" type="checkbox"/>	<input type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input type="checkbox"/> Marking
§2.5	PPE which may be caught up during use	<input checked="" type="checkbox"/>	<input type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input type="checkbox"/> Marking
§2.12	PPE bearing one or more identification markings or indicators directly or indirectly relating to health and safety	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input checked="" type="checkbox"/> Marking
§2.14	Multi-risk PPE	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input checked="" type="checkbox"/> Marking
§3.3	The PPE is intended to protect against mechanical injuries	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input checked="" type="checkbox"/> Marking
§3.10.2	PPE intended to protect against substances and mixtures which are hazardous to health and against harmful biological agents - Cutaneous contact	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input checked="" type="checkbox"/> Marking

Available sizes :

Minimum length of glove (mm) / Minimum width of glove (mm)	Sizes
330 /100	07
330/107	08
330/110	09
330/115	10
330/119	11

Glove constitution :

	Reference	Color	Material	Surfacic mass	Gauges	Thickness
Palm	2930211	Black	Polychloroprene			0,72 mm
Back	2930211	Black	Polychloroprene			0,72 mm
Lining	2923002	Natural	Cotton flocked			0,72 mm
Cuff	2930211	Black	Polychloroprene			0,72 mm

PROTECTION SCOPE

This glove meets the essential requirements of the Personal Protective Equipment Regulation 2016/425.
This glove is designed against mechanical risks, chemical risks, microorganisms risks and other risks.
It is a category III product, module C2

Notified Body Reference : VIPO (2369)
Gen. Svobodu 1069/4, 958 01 Partizanske, Slovakia

GENERAL REQUIREMENTS

Standard EN 420 : 2003 + A1 : 2009

Dexterity : 5
Size : conform

At the date of certificate the product is in compliance with Annex XVII of REACH regulation (n° 1907/2006 and revisions)

SPECIFIC REQUIREMENTS AND PERFORMANCE LEVELS

Mechanical hazard EN 388 : 2016 + A1 : 2018

Protection offered	Performance levels
Abrasion resistance	2
Blade cut resistance	1
Tear strength resistance	1
Puncture resistance	0
Cut Resistance method (EN ISO 13997)	X
Impact Protection	-

The levels of performance have been measured on the palm

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.

Chemical hazard EN 374-2 : 2014

Protection offered	Performance levels
Water tightness	conform
Air tightness	conform

Chemical hazard EN ISO 374-1 : 2016 / A1 : 2018

Type :	Type A
---------------	--------

Tested chemical :	CAS N°	Letter	Permeation performance levels:	Degradation value:
Methanol	67-56-1	A	4	16,7%
Sodium hydroxide 40%	1310-73-2	K	6	-23,7%
Sulphuric acid 96%	7664-93-9	L	5	16,8%
Nitric acid 65%	7697-37-2	M	5	2,6%
Acetic acid 99%	64-19-7	N	4	20,7%
Ammonium hydroxide 25%	1336-21-6	O	5	-13,0%
Other tested chemical :	CAS N°	Letter	Permeation performance levels:	Degradation value:
Hydrogene peroxide 30%	7722-84-1	P	6	-5,7%
Formaldehyde 37%	50-00-0	T	6	9,1%

Microorganism EN ISO 374-5 : 2016

This glove protect against microorganism
Uncontrolled against viruses

TEST REPORTS

Laboratory	CTC	Other
EN 420 + innocuousness	L170815929_1 L171223517_1 L170815930_1	
EN 388	L170815929_1 L170509038_1 L171223517_1	
EN 374-2	L150404073_1	
EN 16523-1	L171020693_1 L171020694_1	
Other	L170815930_1 L170509039_1	

MARKING - PACKAGING

Information printed on the glove :

Logo of Manufacturer :

Logo 

Glove's reference : 2095020

Article Code :

Size indicator

Pictograms related to risks against which protection is offered with performance levels

Information pictogram

Address of Manufacturer :

Date of Manufacture (month/year) and/or Serial number :

Marking example :

 PowerCoat® 20 950 20 XX	Address: HONEYWELL SAFETY PRODUCTS EUROPE Immeuble Edison ZI-Paris Nord II 33 Rue des Vanesses 95 958 ROISSY CDG CEDEX France
     <p style="font-size: small;">Lot N°: WW/ YYYY 2110X AKLMNOPT</p>	 Address has to be printed on back side of the gloves or on a label inside the gloves.

Method of marking on the glove :

Ink jet

Packaging :

10 pairs per bundle, 10 bundle per box

PPE subject to ageing :

The design performance can not be significantly affect by ageing when stored in appropriate conditions (humidity, temperature, clean , ventilated, light).

Declaration of conformity :

Available on : <https://doc.honeywellsafety.com/>

MEANS OF CONTROL

Final inspection plan : in accordance to ISO 2859 level 1
Major defects : NQA = 1,5 / Minor defects : NQA = 10.

Sampling Plan		Quantity of acceptable defects	
<i>Lot Quantity</i>	<i>Sample quantity</i>	<i>Minor Defects</i>	<i>Major Defects</i>
110 to 200	D 8	2	0
201 to 500	F 20	5	1
501 to 1200	G 30	7	1
1201 to 10000	J 80	14	3
10000	K 125	21	5